2 Part Magnetic Receptive Graphic System includes a mounting magnet with permanent adhesive or a 2 sided mounting magnet with a magnetic receptive <u>paint</u> that is applied to the intended surface and a printable magnetic receptive media that is affixed to mounting magnet. The printable media can be switched out and re-used many times over.

Description:

Printable Magnetic Media: 10mil Matte White Polyester, 16mil Matte White Vinyl, 12mil Matte White Polypropylene, 13mil Semi-Matte Paper or 10mil Dry-Erase Whiteboard

Mounting Media: 20 or 30mil high energy Mounting Magnet w/ Permanent Adhesive

Mounting Media: Magnetic Receptive Paint with Double-Sided Mounting Magnet

2. Applications & Storage:

- Wall & Fixture Graphics
- Retail POP & POS Graphics
- Menu Boards & Directories
- Interior Design Decoration



Print Method: UV Curable, Latex, Solvent, Eco-Solvent Digital Printers, Screen

Working Condition: ambient temperature and humidity

Storage Condition: store indoors in normal temperatures up to one year

3. Specifications:

Roll Length: 100 Ft.

Roll Widths: 48", 50", 54" and 60"

3.2 Physical Data

Thickness		Whiteness	Brightness	Tensile Strength	
(mm)	Weight (g/m²)	(Wb)	(Gs)	(Mpa)	%
0.25±0.02	540±50	【85, 95】	【1, 5】	[40, 50] [30, 40]	20,35】【20,35】


3.3 Magnetic Data

Lifting Weight : ≥ 5.0 (g/cm²)

(0.7MM : 40g/cm2)

Condition: the standard test tool is isotropic rubber magnet 0.7mm (Holding Strength is about 40g/cm2), test equipment is Tensile Strength Tester.

1. Construction:

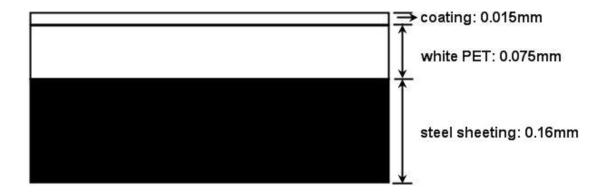

Ships from Knoxville, TN 37701

Plastiprint Sales Company 575 Union Blvd. Ste. 103 Lakewood, CO 80228 Phone#: 303-987-0450

www.plastiprint.com